

## GERFLAT HD+

Standard duty lay-flat discharge hose,  
reinforced with polyester yarn

*Tuyau plat à usage standard, renforcé de fil polyester*




**Structure:** Flexible hose made out of soft-grade PVC wall, reinforced with polyester yarn.

**Applications:** Designed for standard duty discharge of liquids compatible with PVC, in agriculture, civil engineering, tank trucks, and water delivery at medium working pressure in irrigation systems.



**Structure :** Tuyau flexible fait d'une paroi PVC souple renforcé de fil polyester.

**Applications :** Conçu pour une utilisation standard de refoulement de liquides compatibles avec le PVC, dans l'agriculture, le BTP, citerne de camion et pour de l'irrigation à moyenne pression.

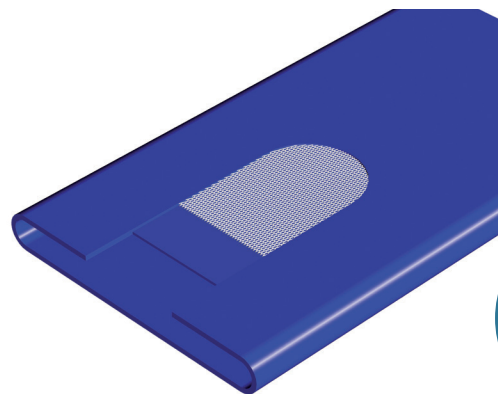

Tuyaux plats

int mm	int inch	kg/m	bar	bar	m
40		0,320	7	21	50-100
45	1"3/4	0,340	7	21	50-100
51	2"	0,360	7	21	50-100
76	3"	0,650	6	18	50-100
80	3"1/8	0,700	6	18	50-100
102	4"	0,900	6	18	50-100
152	6"	1,450	5	14	50

### Printing | Marquage :

n° de lot

### Temperature | Température :

- 5 / + 60 °C  
23 / + 140 °F

### Properties | Caractéristiques :

Smooth inside, smooth outside.  
*Lisse intérieur, lisse extérieur.*

### Colors | Couleurs :

