

P3 PU

Medium weight and flexible polyurethane ducting
PVC-coated spring steel wire

*Gaine flexible en polyuréthane renforcée d'une
spire acier gainée PVC pour un usage intensif*




Structure: Flexible ducting made out of polyester polyurethane wall reinforced with PVC-coated spring steel wire for grounding.

Applications: Designed for suction of abrasive materials, transport of granules in paper, woodworking, metal and plastic industries. Good oil and excellent abrasion resistance.







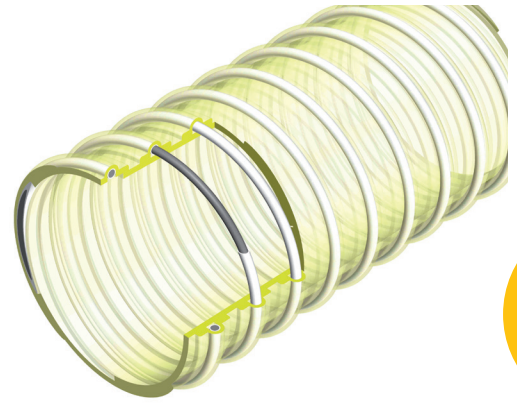


Structure : Gaine flexible faite d'une paroi polyuréthane polyester souple renforcée d'une spirale en acier ressort gainée PVC pour une mise à la terre.

Applications : Conçue pour une utilisation d'aspiration de matières abrasives, transport de granules dans l'industrie du papier, du bois, de la métallurgie et du plastique.



Gaine PU

						
int mm	kg/m	mm	mm	bar	bar	m
20	0,170	0,80	30	2,30	0,70	10
25	0,210	0,80	45	2,10	0,50	10
30	0,250	0,80	45	2,10	0,50	10
32	0,300	0,80	48	2,00	0,45	10
40	0,350	0,90	60	2,00	0,45	10
45	0,400	0,90	68	1,80	0,40	10
50	0,440	0,90	75	1,80	0,40	10
55	0,480	0,90	83	1,60	0,35	10
60	0,530	0,90	90	1,60	0,35	10
65	0,570	0,90	98	1,50	0,35	10
70	0,610	0,90	105	1,50	0,35	10
75	0,640	0,90	113	1,20	0,30	10
80	0,670	0,90	120	1,20	0,30	10
85	0,930	0,90	128	1,00	0,30	10
90	1,180	0,90	135	1,00	0,30	10
100	1,020	1,10	150	1,00	0,30	10
115	1,120	1,10	173	0,80	0,25	10
120	1,220	1,10	180	0,80	0,25	10
125	1,280	1,10	185	0,75	0,20	10
130	1,330	1,10	195	0,50	0,20	10
140	1,380	1,10	210	0,50	0,20	10
150	1,460	1,10	225	0,50	0,20	10
160	1,520	1,10	240	0,45	0,15	10
170	1,600	1,10	250	0,45	0,15	10
175	1,700	1,10	260	0,45	0,15	10
180	1,780	1,10	270	0,35	0,12	10
200	1,940	1,10	300	0,35	0,12	10
225	2,550	1,30	338	0,25	0,10	10
250	3,150	1,30	375	0,25	0,10	10
300	3,780	1,30	450	0,20	0,09	10
350	4,410	1,30	525	0,15	0,09	10
400	5,050	1,30	600	0,10	0,08	5
450	6,710	1,30	675	0,08	0,06	5
500	7,200	1,30	750	0,05	0,04	5



Temperature | Température :


- 40 / + 100 °C
- 22 / + 212 °F

Properties | Caractéristiques :

Smooth bore, solid construction, very good abrasion resistance, good oil resistance.

Lisse intérieur, construction robuste, très bonne résistance à l'abrasion, bonne résistance aux huiles.

Colors | Couleurs :

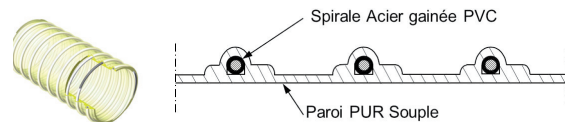

Cuffs screwable on request |
Embout vissable sur demande :

