


# TOIVAC

Heavy weight and very flexible ducting PE- convoluted  
*Gaine flexible et lourde en PE renforcée d'un profil PE HT*



Gaine polyoléfine

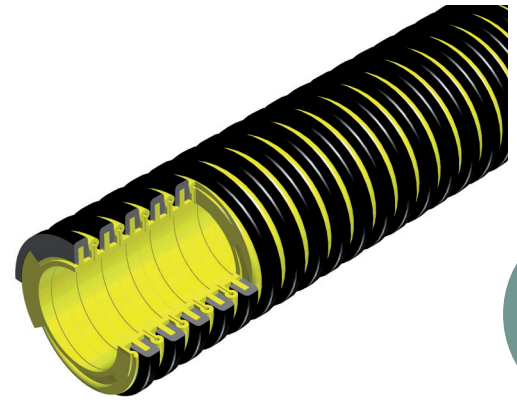







**Structure:** Flexible heavy weight ducting made out of convoluted PE wall.

**Applications:** Designed for suction of liquids in sanitary and sewer, truck cleaning stations, tiger tail.



**Structure :** Gaine flexible lourde faite d'une paroi en PE convolutoée.

**Applications :** Conçue pour les aspirations de liquides d'égouts, les camions et l'assainissement, queue de tigre.

					
int mm	kg/m	mm	mm	bar	m
51	0,950	1,40	85	0,95	10-15-20-30
63	1,150	1,40	105	0,95	10-15-20-30
76	1,400	1,40	125	0,90	10-15-20-30
102	1,800	1,40	165	0,85	10-15-20-30



Temperature | Température :

- 40 / + 60 °C  
 - 40 / + 140 °F

Properties | Caractéristiques :

Very flexible even at low temperature, crush recoverable, good chemical resistance, full vacuum resistant, rot-proof.  
*Très flexible même à basse température, retour à l'écrasement, bonne résistance chimique et à l'usure extérieure, très bon comportement au vide.*

Colors | Couleurs :

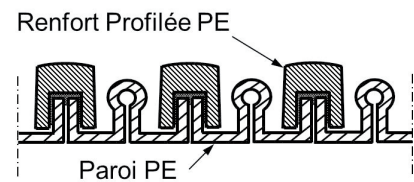

Screw-on cap on request |  
 Embout vissable sur demande :

